


Optribution Basic Twin L-Band Link DEV 7241 & DEV 7341

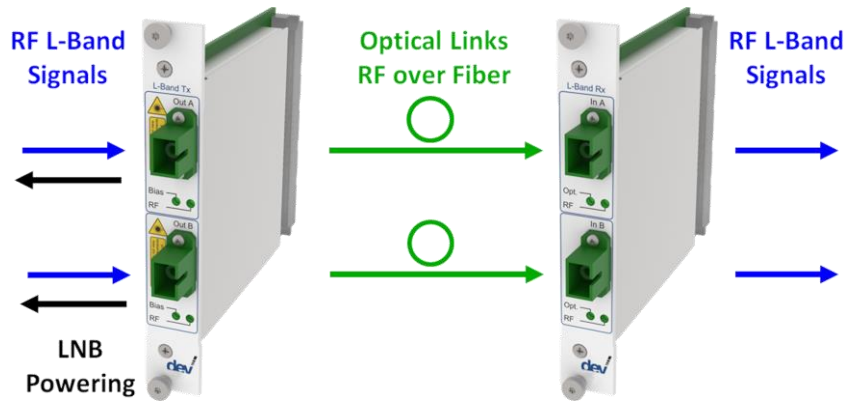

The final product may vary from the above image depending on the options selected.

Products:

DEV 7241 Basic Twin Optribution Transmitter; 850...2450 MHz; SC/APC

DEV 7341 Basic Twin Optribution Receiver; 850...2450 MHz; SC/APC

Features:

- ▀ Two Transmitters or Receivers per Module
- ▀ Recommended for RF-over-Fiber Links with optical Losses up to 10 dB
- ▀ Fixed Gain
- ▀ RF Sensing with Status LED
- ▀ LNB Powering, switchable 13/18 V and 22 kHz Tone
- ▀ Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7241 & DEV 7341

	Value	Condition
Frequency Range	850...2450 MHz	
Max. Link Gain	4±3 dB	
Adjustable Gain (Rx Module)	0...8 dB	Note 4
Flatness	±1.5 dB ±0.2 dB	850...2450 MHz In any 36 MHz window
Return Loss	>14 dB, typ. 16 dB	
Gain Stability	±2 dB	0...+50 °C / 32...122 °F
Group Delay Distortion	<2 ns	Notes 2, 3
Nominal RF Input Level	-10 dBm	Aggregated power
Noise Figure	<26 dB	
SFDR _{2/3}	103 dB/Hz ^{2/3}	
CNR	>56 dB	Notes 1, 2, 3
Output IP3	>7 dBm	
OP1dB	>-1 dBm	
Intermodulation Distortion	>40 dBc	@ 2 tones, -18 dBm each
Input Power dynamic Range	-45...-6 dBm	Aggregated power
Damage RF Input Level	12 dBm	Aggregated power
Optical Budget	23 dB	@ nominal RF input level

Note 1: $P_{in} = -15$ dBm

Note 2: 36 MHz window

Note 3: with back to back fiber connection (2 m) and minimum noise figure

Note 4: adjustable gain with Option Plus, only

Technical Data DEV 7241 & DEV 7341

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μ m	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7241)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	2 mW / 1.6 dBm	
Power Consumption	12 V; 250 mA	Without LNB power
Weight	~0.5 kg	
Tx LNB Power & Current Monitoring		
LNB Power	Max. 350 mA	
Voltage and Tone Control	13 V, 18 V and 0 Hz, 22 kHz	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Rx Specifications (DEV 7341)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	<-22 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	12 V; 250 mA	
Weight	~0.3 kg	
Tx & Rx RF Sensing		
Adjustable Threshold Level (THL)	0 dBm > THL > -50 dBm	
Threshold Repeatability	<0.1 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	

Order Information

Products	
DEV 7241	Basic Twin Optribution Transmitter; 850...2450 MHz; SC/APC
DEV 7341	Basic Twin Optribution Receiver; 850...2450 MHz; SC/APC

Option for DEV 7341	
Option Plus	Adjustable Gain

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 13-Sep-2022

Disclaimer

The information contained herein is believed to be reliable. DEV Systemtechnik makes no warranties regarding the information contained herein. DEV Systemtechnik assumes no responsibility or liability whatsoever for any of the information and for the use of the information contained herein. The information contained herein is provided "AS IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders.