


Optribution Advanced UHF/VHF Link DEV 7238 & DEV 7338

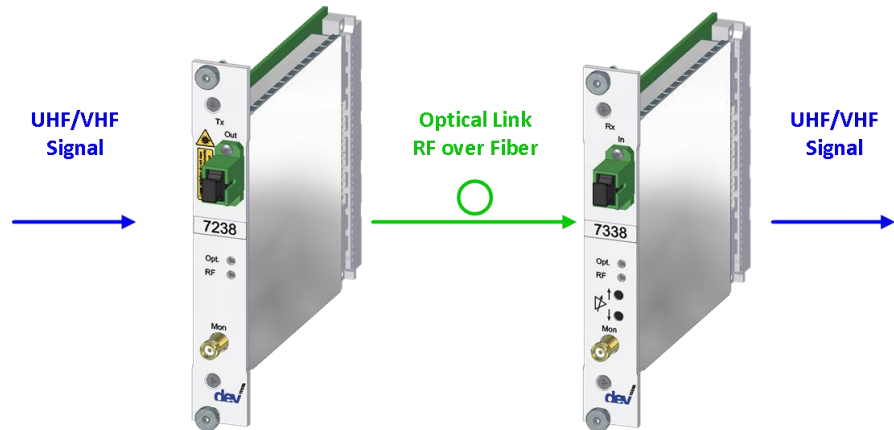

The final product may vary from the above image depending on the options selected.

Products:

- DEV 7238** UHF/VHF Optribution Transmitter; 47...1006 MHz;
SC/APC; 1550 nm
- DEV 7338** Advanced UHF/VHF Optribution Receiver; 47...1006 MHz;
SC/APC; with adjustable Gain and Slope

Features:

- ▀ Optimized for UHF and VHF Signal Transmission over Fiber
- ▀ RF Sensing Feature for Optical Transmitter (Tx) Module and Optical Receiver (Rx) Module
- ▀ RF Monitoring Port for Tx and Rx Module
- ▀ Adjustable Gain and Slope Feature for Rx Module
- ▀ Available Wavelength Options for CWDM Applications
- ▀ Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7238 & DEV 7338

	Value	Condition
Frequency Range	47...1006 MHz	
Max. Link Gain	20±3 dB	
Adjustable Gain (Rx Module)	0...15 dB ±0.5 dB in 1 dB Steps	
Adjustable Slope (Rx Module)	0...18 dB in 1 dB Steps	
Flatness	±1.5 dB ±0.2 dB	47...1006 MHz In any 8 MHz window
Return Loss	>14 dB, typ. 16 dB	
Gain Stability	±2.0 dB	0...+50 °C / 32...122 °F
Group Delay Distortion	<2 ns	Note 2, 3
Nominal RF Input Level	-10 dBm	Aggregated power
Noise Figure	<26 dB	
SFDR _{2/3}	110 dB/Hz ^{2/3}	
CNR	64 dB	Note 1, 2, 3
Output IP3	>22 dBm	
OP1dB	>+7 dBm	
Intermodulation Distortion	>60 dBc	@ 2 tones, -13 dBm each
Input Power dynamic Range	-58...+1 dBm	Aggregated power
Damage RF Input Level	24 dBm	Aggregated power

Note 1: $P_{in} = -15$ dBm

Note 2: 8 MHz window

Note 3: with back to back fiber connection (2 m) and minimum noise figure

Technical Data DEV 7238 & DEV 7338

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μm	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7238)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	3 mW / 4.8 dBm	
Available CWDM Wavelengths	1550 nm ±10 nm standard, 9 different Wavelengths available	Note 1
Power Consumption	15 V; 200 mA	
Weight	~0.5 kg	
Rx Specifications (DEV 7338)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	<-22 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	15 V; 200 mA	
Weight	~0.3 kg	
Tx & Rx Monitor Port		
Impedance, Connector	50 Ohm, SMA (f)	
Return Loss	>16 dB typ.	
Insertion Loss / Flatness Monitor Port	= Input Level – 20 dB ±2 dB (Tx) = Output Level – 20 dB ±2 dB (Rx)	
Tx & Rx RF Sensing		
Adjustable Threshold Level (THL)	0 dBm > THL > -50 dBm	
Threshold Repeatability	<0.1 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	

Note 1: Please refer to the Order Information section for the available wavelength options.

Order Information

Products																									
DEV 7238	UHF/VHF Optribution Transmitter; 47...1006 MHz; SC/APC; 1550 nm																								
Wavelength Options:																									
	<table border="1"> <thead> <tr> <th>Option</th> <th>Wavelength</th> <th>Option</th> <th>Wavelength</th> </tr> </thead> <tbody> <tr> <td>Lambda 0</td> <td>1310 nm ±10 nm</td> <td>Lambda 5</td> <td>1550 nm ±10 nm (standard)</td> </tr> <tr> <td>Lambda 1</td> <td>1470 nm ±10 nm</td> <td>Lambda 6</td> <td>1570 nm ±10 nm</td> </tr> <tr> <td>Lambda 2</td> <td>1490 nm ±10 nm</td> <td>Lambda 7</td> <td>1590 nm ±10 nm</td> </tr> <tr> <td>Lambda 3</td> <td>1510 nm ±10 nm</td> <td>Lambda 8</td> <td>1610 nm ±10 nm</td> </tr> <tr> <td>Lambda 4</td> <td>1530 nm ±10 nm</td> <td></td> <td></td> </tr> </tbody> </table>	Option	Wavelength	Option	Wavelength	Lambda 0	1310 nm ±10 nm	Lambda 5	1550 nm ±10 nm (standard)	Lambda 1	1470 nm ±10 nm	Lambda 6	1570 nm ±10 nm	Lambda 2	1490 nm ±10 nm	Lambda 7	1590 nm ±10 nm	Lambda 3	1510 nm ±10 nm	Lambda 8	1610 nm ±10 nm	Lambda 4	1530 nm ±10 nm		
Option	Wavelength	Option	Wavelength																						
Lambda 0	1310 nm ±10 nm	Lambda 5	1550 nm ±10 nm (standard)																						
Lambda 1	1470 nm ±10 nm	Lambda 6	1570 nm ±10 nm																						
Lambda 2	1490 nm ±10 nm	Lambda 7	1590 nm ±10 nm																						
Lambda 3	1510 nm ±10 nm	Lambda 8	1610 nm ±10 nm																						
Lambda 4	1530 nm ±10 nm																								
DEV 7338	Advanced UHF/VHF Optribution Receiver; 47...1006 MHz; SC/APC; with adjustable Gain and Slope																								

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH
 Grüner Weg 4A
 61169 Friedberg
 GERMANY
 Phone: +49 6031 6975 100
 Fax: +49 6031 6975 114
 info@dev-systemtechnik.com
 www.dev-systemtechnik.com

Rev. 29-May-2024

Disclaimer

The information contained herein is believed to be reliable. DEV Systemtechnik makes no warranties regarding the information contained herein. DEV Systemtechnik assumes no responsibility or liability whatsoever for any of the information and for the use of the information contained herein. The information contained herein is provided "AS IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders.