


Optribution 10 MHz Link DEV 7235 & DEV 7335

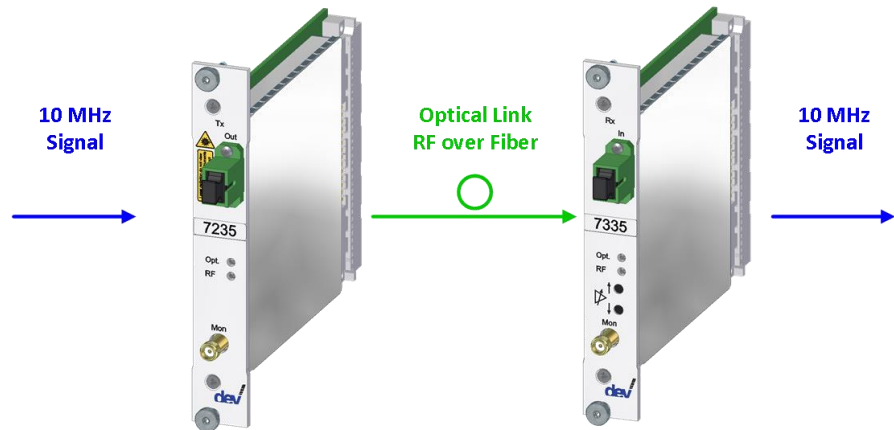

The final product may vary from the above image depending on the options selected.

Products:

DEV 7235 Reference Optribution Transmitter; 10 MHz; SC/APC

DEV 7335 Reference Optribution Receiver; 10 MHz; SC/APC

Features:

- Optimized for 10 MHz Reference Signal Transmission
- Adjustable Gain
- RF Sensing Feature for Optical Transmitter (Tx) Module and Optical Receiver (Rx) Module
- RF Monitoring Port
- Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7235 & DEV 7335

	Value	Condition
Frequency Range	10 MHz	
Max. Link Gain	0±1 dB	
Adjustable Gain (Rx Module)	0...5 dB ±0.5 dB in 1 dB Steps	
Return Loss	>9 dB	
Gain Stability	±1 dB	0...+50 °C / 32...122 °F
Nominal RF Input Level	-3 dBm	Aggregated power
Phase Noise	1 Hz <-115 dBc/Hz 10 Hz <-130 dBc/Hz 100 Hz <-140 dBc/Hz 1 kHz <-140 dBc/Hz 10 kHz <-140 dBc/Hz 100 kHz <-140 dBc/Hz 1 MHz <-140 dBc/Hz	
CNR	>80 dB	Notes 1, 2
OP1dB	>10 dBm	
Harmonic Distance	38 dBc	@ nominal RF input level
Damage RF Input Level	20 dBm	Aggregated power

Note 1: $P_{in} = -3$ dBm

Note 2: with back to back fiber connection (2 m)

Technical Data DEV 7235 & DEV 7335

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μ m	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7235)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	3.5 mW / 5.4 dBm	
Wavelength	1550 nm \pm 10 nm	
Power Consumption	12 V; 200 mA	
Weight	~0.5 kg	
Rx Specifications (DEV 7335)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	<-15 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	12 V; 250 mA	
Weight	~0.3 kg	
Tx & Rx Monitor Port		
Impedance, Connector	50 Ohm, SMA (f)	
Return Loss	>20 dB typ.	
Insertion Loss / Flatness Monitor Port	= Input Level – 25 dB \pm 2 dB (Tx) = Output Level – 25 dB \pm 2 dB (Rx)	
Tx & Rx RF Sensing		
Dynamic Range	-25...+5 dBm	
Adjustable Threshold Level (THL)	+5 dBm > THL > -25 dBm	
Threshold Repeatability	<0.1 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1E	

Order Information

Products	
DEV 7235	Reference Optribution Transmitter; 10 MHz; SC/APC
DEV 7335	Reference Optribution Receiver; 10 MHz; SC/APC

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH
Grüner Weg 4A
61169 Friedberg
GERMANY
Phone: +49 6031 6975 100
Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 11-Nov-2024

Disclaimer

The information contained herein is believed to be reliable. DEV Systemtechnik makes no warranties regarding the information contained herein. DEV Systemtechnik assumes no responsibility or liability whatsoever for any of the information and for the use of the information contained herein. The information contained herein is provided "AS IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders.